

# PRODUCT SPECIFICATION SHEET



## Product Figure Description:


- Three Side Viewing Linear Wall Mounted & Wall Recessed & Free-standing Electric fireplace
- Two levels heating functions, first step heating 900W, Second step heating 1800W
- Five levels flame brightness adjustment
- Multiple 15 colors LED flames
- Multiple 15 colors LED ember-bed colors
- Multiple 15 colors LED down-light colors
- Three levels flame speed adjustment
- Temperature setting:

| Display value |    | 0  | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
|---------------|----|----|----|----|----|----|----|----|----|----|----|----|
| Temperature   | °C | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 |
|               | °F | 68 | 70 | 72 | 74 | 76 | 78 | 80 | 82 | 84 | 86 | 88 |

- Equipped with timer settings from 0.5-8 hours
- Equipped with realistic fire cracking sound
- Operate with multi-function remote control, touch control panel and smart App.
- Realistic crystals, drift logs for fuel bed
- Flame only mode available (no heat).
- Safety children lock available for heating (Heat Disabled)
- Safety thermal cut OFF device equipped
- Tempered front glass panel
- Heavy gauge power cord at least 180cm or 71" in length
- Suitable for room from 20-30 m<sup>2</sup>
- ISTA-3A Package

# PRODUCT SPECIFICATION SHEET

## Product Dimension

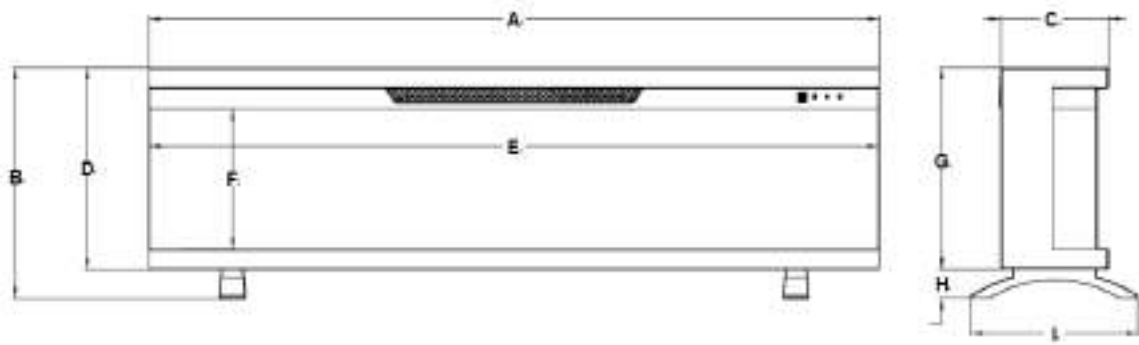

| PRODUCT DIMENSIONS (mm) |                 |                   |                    |                   |                    |                   |                   |                  |                     |
|-------------------------|-----------------|-------------------|--------------------|-------------------|--------------------|-------------------|-------------------|------------------|---------------------|
| Model Number            | A               | B                 | C                  | D                 | E                  | F                 | G                 | H                | I                   |
| EF-U107                 | 42"<br>[1070mm] | 15.75"<br>[400mm] | 7.35"<br>[186.6mm] | 13.78"<br>[350mm] | 41.93"<br>[1065mm] | 9.6"<br>[243.8mm] | 13.78"<br>[350mm] | 2-3/8"<br>[60mm] | 11-7/16"<br>[290mm] |
| EF-U127                 | 50"<br>[1270mm] | 15.75"<br>[400mm] | 7.35"<br>[186.6mm] | 13.78"<br>[350mm] | 49.92"<br>[1268mm] | 9.6"<br>[243.8mm] | 13.78"<br>[350mm] | 2-3/8"<br>[60mm] | 11-7/16"<br>[290mm] |
| EF-U152                 | 60"<br>[1524mm] | 15.75"<br>[400mm] | 7.35"<br>[186.6mm] | 13.78"<br>[350mm] | 59.92"<br>[1522mm] | 9.6"<br>[243.8mm] | 13.78"<br>[350mm] | 2-3/8"<br>[60mm] | 11-7/16"<br>[290mm] |
| EF-U183                 | 72"<br>[1830mm] | 15.75"<br>[400mm] | 7.35"<br>[186.6mm] | 13.78"<br>[350mm] | 71.89"<br>[1826mm] | 9.6"<br>[243.8mm] | 13.78"<br>[350mm] | 2-3/8"<br>[60mm] | 11-7/16"<br>[290mm] |

## Product Parameter:

|                   |           |                                                                                     |                      |                                                      |
|-------------------|-----------|-------------------------------------------------------------------------------------|----------------------|------------------------------------------------------|
| Voltage:          | 220-240V  |  | Ember Bed Color:     | 15 Colors                                            |
| Frequency:        | 50Hz      |                                                                                     | Down-Light Color:    | 15 Colors                                            |
| Low Heat:         | 900W      |                                                                                     | Control Method:      | Remote control,<br>Touch Control panel,<br>Smart APP |
| High Heat:        | 1800W     |                                                                                     | Media Decoration:    | Crystals, Drift logs                                 |
| Product Color:    | Black     |                                                                                     | Temperature setting: | 20-30°C                                              |
| Flame Color:      | 15 Colors |                                                                                     | Timer setting:       | 0.5-8Hours                                           |
| Flame Brightness: | 5 Levels  |                                                                                     | Fire Cracking:       | Yes                                                  |
| Flame Speed:      | 3 Levels  | Certificate                                                                         | Hardware Kit:        | Included                                             |